

LCOS LX 7.14

R&S® LANCOM LX-7400

Powerful Wi-Fi 7 all-rounder for modern business environments



The new R&S® LANCOM LX-7400 Wi-Fi 7 access point is the ideal choice for modern Wi-Fi projects in offices, schools, and hotels. As a powerful all-round Wi-Fi solution, it combines high performance with flexible application options, making it perfect for environments with medium to high usage. Featuring the latest Wi-Fi technology, it ensures fast connections and high stability—even when many end devices are connected simultaneously.

- ▶ Wi-Fi 7 access point with 2x2 MIMO at 2.4 GHz and 4x4 MIMO at 5 and 6 GHz, delivering a maximum data rate of 18 Gbps
- ▶ OFDMA for more efficient Wi-Fi channel utilization
- ▶ 1x 10 GE port with PoE++ (IEEE 802.3bt) and 1x 1 GE port
- ▶ IoT support: BLE 5.4 and USB 2.0
- ▶ 1x 12V power input (power supply not included)
- ▶ Holistic, automated Wi-Fi optimization with R&S® LANCOM Active Radio Control 2.0
- ▶ Housing with IP50 protection rating and UL 2043 compliance (certified fire resistance and low smoke emission in case of fire)
- ▶ Innovative design with flexible, theft-proof mounting plate
- ▶ Automatic detection of wall or ceiling mounting via position sensor
- ▶ Energy-saving functions with precise power consumption monitoring (R&S® LANCOM Active Power Control)
- ▶ Automated provisioning, operation, and optimization via the R&S® LANCOM Management Cloud (R&S® LMC)
- ▶ Support for Wi-Fi controller (including Layer 3 tunneling)
- ▶ Suitable for use with electrical medical devices in non-life-critical environments (EN 60601-1)

R&S® LANCOM LX-7400

Faster data transfer

With Wi-Fi 7, you benefit from a speed boost of up to 240% compared to Wi-Fi 6 in real-world applications. This is made possible by a doubling of the available frequency spectrum for Wi-Fi through additional 6 GHz frequencies, a doubled maximum channel width (320 MHz instead of the previous 160 MHz), and an increased data density during transmissions (4096 QAM instead of 1024 QAM in Wi-Fi 6). As a result, the R&S® LANCOM LX-7400 delivers a maximum aggregated data rate of 18 Gbps across all frequency bands.

More stable transmission quality

Multi-link operation (MLO) automatically uses the frequency band with better quality or even uses two frequency bands simultaneously. In addition, Multi-RU and Puncturing effectively mitigates the previously serious consequences of interference signals. This ensures significantly more reliable transmission and reception quality, especially in radio environments with high signal density.

Housing design optimized for field use

The design of the R&S® LANCOM LX-7400 is based on decades of market experience and valuable user feedback. Its flattened side contours give it a discreet appearance, allowing it to blend seamlessly into any environment. With IP50 protection rating, including rubber-sealed ports, the access point is dustproof. Additionally, it features certified fire resistance and low-smoke emissions in case of fire (UL 2043). The compact mounting bracket with a security lock not only helps prevent opportunistic theft but is also compatible with standard mounting hole patterns from various manufacturers. Optionally, the R&S® LANCOM LX-7000 series offers a specially designed mounting system for ergonomic and time-saving installation on T-bars of suspended ceilings.

Always keeping track – position sensor for optimal Wi-Fi performance

With the integrated position sensor, you always have full control over the physical orientation of your access points. Models in the LX-7000 series automatically detect whether they are correctly mounted on a wall or ceiling. This status is clearly displayed in the R&S® LANCOM Management Cloud or via WEBconfig, making it easy to verify both during initial setup and ongoing monitoring—without the need for on-site inspections. This saves valuable time during troubleshooting and ensures consistently high Wi-Fi performance.

Carpooling in the radio field – OFDMA for more efficient data traffic

Orthogonal Frequency Division Multiple Access (OFDMA) also aims to optimize the use of the radio field: The frequency range of a Wi-Fi channel is divided into several frequency blocks within a unit of time, creating sub-channels (sub-carriers) with a narrow channel width of up to 2 MHz. This prevents small data packets, which often originate from IoT devices, from taking up and blocking an entire channel with a width of 20, 40 or even 80 MHz. In addition, the LX-7400 bundles several sub-channels and transports them together like a kind of carpool to enable the freest and smoothest possible radio traffic.

Interference-free use of the 6 GHz frequency band for modern and future applications

Take a seat in the VIP lounge in the Wi-Fi: The R&S® LANCOM LX-7400 offers an exclusive Wi-Fi radio field free of interference in the 6 GHz frequency band. While the 2.4 and 5 GHz bands can be used by other wireless technologies such as alarm systems or audio applications, the broadband 6 GHz spectrum is intended for exclusive Wi-Fi use. This enables interference-free Wi-Fi connections with minimal latency and maximum data throughput. Fast-response connections and time-critical Wi-Fi applications in particular benefit from this.

R&S® LANCOM LX-7400

Wi-Fi product specification	
Frequency band 2.4 GHz, 5 GHz and 6 GHz	2400-2483.5 MHz (ISM), 5150-5700 MHz (depending on country-specific restrictions), 5925-6425 MHz
Integrated Antenna Gain (peak gain)	up to 4 dBi in 2.4 GHz, up to 6 dBi in 5 GHz and up to 6 dBi in 6 GHz
Data rates IEEE 802.11be	<ul style="list-style-type: none"> ▶ up to 11530 MBit/s according to IEEE 802.11be with MCS13/QAM-4096 at 6 GHz, 4x4 MIMO and 320 MHz channel width ▶ up to 5765 MBit/s according to IEEE 802.11be with MCS13/QAM-4096 at 5 GHz, 4x4 MIMO and 160 MHz channel width ▶ up to 688 MBit/s nach according to IEEE 802.11be with MCS13/QAM-4096 at 2,4 GHz, 2x2 MIMO and 40 MHz channel width
Data rates IEEE 802.11ax	<ul style="list-style-type: none"> ▶ up to 4800 MBit/s according to IEEE 802.11ax with MCS11/QAM-1024 at 6 GHz, 4x4 MIMO and 160 MHz channel width ▶ up to 4800 MBit/s according to IEEE 802.11ax with MCS11/QAM-1024 at 5 GHz, 4x4 MIMO and 160 MHz channel width ▶ up to 575 MBit/s according to IEEE 802.11ax with MCS11/QAM-1024 at 2.4 GHz, 2x2 MIMO and 40 MHz channel width
Data rates IEEE 802.11n	300 Mbps according to IEEE 802.11n with MCS15 (fallback to 6.5 Mbps with MCS0).
Data rates IEEE 802.11a/ h	54 Mbps (fallback to 48, 36 , 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power output) and DFS (automatic channel selection, radar detection)
Data rates IEEE 802.11b/g	54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection)
Radio channels 6 GHz	Up to 24 non-overlapping channels (EU; 20 MHz channel width)
Radio channels 5 GHz	Up to 16 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel selection depending on national regulations), configurable maximum transmit power
Radio channels 2.4 GHz	Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions), configurable maximum transmit power
Multi-SSID	Up to 32; time-controlled activation and deactivation of Wi-Fi networks
Concurrent Wi-Fi clients	Up to 256 clients per WiFi radio
Hotspot	Support for the Cloud-managed Hotspot in combination with the R&S® LANCOM Management Cloud; Support for Frederix Hotspot (in combination with R&S® LANCOM Management Cloud)
WLAN operation modes	Access Point (infrastructure), client mode, WDS/point-to-point links
Supported Wi-Fi standards	
IEEE standards	IEEE 802.11be, IEEE 802.11ax, IEEE 802.11ac Wave 2, IEEE 802.11n, IEEE 802.11a, IEEE 802.11g, IEEE 802.11b, IEEE 802.11i, IEEE 802.1X authenticator, IEEE 802.1X LAN supplicant (only on PoE port), IEEE 802.11h, IEEE 802.11d, IEEE 802.11v
Standard IEEE 802.11be	
Supported features	MLO, OFDMA Multi-RUs, QAM-4096, 320 MHz channel bandwidth in 6 GHz
Standard IEEE 802.11ax	
Supported features	2x2/4x4 DL-/UL-MU-MIMO, DL-/UL-OFDMA, triggered target-wake-time, BSS coloring, QAM-1024, 160 MHz channels
Standard IEEE 802.11ac	
Supported features	2x2/4x4 MIMO, 80 MHz channels, MU-MIMO, QAM-256
Standard IEEE 802.11n	
Supported features	2x2/4x4 MIMO, 40-MHz channels, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgement, STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval
Operating modes	
Modes	Standalone, WLC-managed or LANCOM Management Cloud managed
Wi-Fi security	
Encryption options	IEEE 802.1X (WPA3-Enterprise, WPA2-Enterprise), WPA3-Personal, IEEE 802.11i (WPA2-Personal), WEP, LEPS-U (Private PSK, only possible with WPA2), LEPS-MAC

R&S® LANCOM LX-7400

Wi-Fi security	
Encryption algorithms	AES-CCMP, AES-GCMP, TKIP, RC4
EAP types (authenticator)	EAP-TLS, EAP-TTLS/MSCHAV2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-FAST
Roaming	
Roaming	IAPP (Inter Access Point Protocol), Fast Roaming (802.11r), OKC, Pre-Authentication, 802.11k
R&S® LANCOM Active Radio Control	
R&S® LANCOM Active Radio Control™ 2.0	automated optimization of WLAN channels, channel bandwidth and transmit power, controlled by the R&S® LANCOM Management Cloud
Band Steering	active steering of clients between the 2.4 GHz and 5 GHz band
R&S® LANCOM Active Power Control	
R&S® LANCOM Active Power Control	R&S® LANCOM Sustainability Mode and energy consumption monitoring for the whole network, controlled by the R&S® LANCOM Management Cloud
Bluetooth Low Energy (BLE)	
Support of Bluetooth Low Energy technology (BLE)	The device can scan the environment for BLE devices and can forward the resulting scan data via a REST API.
ESL	communicates with BLE 5.4 compatible ESL displays (via future software update)
Layer 2 functions	
VLAN	4094 VLAN IDs, static assignment to SSIDs, dynamic Assignment via LEPS-U/LEPS-MAC or 802.1X (RADIUS)
Quality of Service	WME based on IEEE 802.11e
Bandwidth limitation	per SSID, per Client
Multicast	IGMP-Snooping, Multicast-to-Unicast-conversion on WLAN interfaces
Protocols	LLDP, Proxy ARP, LACP, L2TPv3, (R)STP
Network	
Protocols	IPv4, IPv6, dual stack
Interfaces	
Ethernet ports	▶ ETH1: 10/100/1000/2.5G/5G/10G BASE-T (RJ45/8P8C), PoE-in 802.3bt ▶ ETH2: 10/100/1000 BASE-T (RJ45/8P8C)
USB 2.0 host port	USB 2.0 host port (USB-A)
Internal antenna	integrated Antennas for WLAN and BLE
Supported IoT Modules	
IoT USB modules	LANCOM Wireless ePaper USB, SES-imagotag Retail IoT Connector, Hanshow HS_C09979 ESL Controller, Hanshow HS_C09978 ESL Controller, SoluM EGU200NA0X ESL GEN2 USB Gateway
Hardware	
Power consumption	idle: 8.9W; max. 29.8W
Environment	Temperature range 0–40 °C. Humidity 0–90 %; non-condensing
Housing	robust housing made of polycarbonate and aluminium, protection class IP50, kensington-lock, 250 x 250 x 65 mm
Weight (including mounting plate)	2.160 kg
orientation sensor	integrated orientation sensor (accelerometer) to detect the Access Points mounting position.


R&S® LANCOM LX-7400

Hardware	
Power supply	12 V DC external plug-in power supply (not included) or PoE (Power-over-Ethernet) according to IEEE 802.3bt. Operation with PoE according to 802.3at with the following limitations: 2+2+2 WLAN streams at 2.4 GHz, 5 GHz, and 6 GHz; Ethernet interface ETH1 2.5 GBit/s. Operation with PoE according to 802.3af only for commissioning (no WLAN operation).
Management and monitoring	
Management	LANCOM Management Cloud, WLAN-Controller, WEBconfig, LANconfig, LL2M, external Syslog, Packet Capturing, TACACS+
Monitoring	R&S® LANCOM Management Cloud, WLAN-Controller, WEBconfig, LANmonitor, SNMP
Conformity*	
Europe/EFTA	CE
Australia / New Zealand	RCM
Applicable for use in medical environments (EN 60601-1-2)	conforms to EN 60601-1-2
fire test	conforms to UL2043 (plenum rated)
Country of Origin	Engineered in Germany, Made in Vietnam
*) Note	The full text of the specific Declaration of Conformity is available here
Scope of delivery	
Documentation	Installation Guide (DE/EN); Mounting Instructions (DE/EN)
Mounting	Robust low profile mounting plate, secure attachment of the device with Click-Lock
Accessories	
R&S® LANCOM PoE++ 10G Injector	1-port PoE injector with up to 10 Gigabit support, integrated power supply, compatible with the standard IEEE 802.3af/at/bt (up to 65W), item no. 61839 (EU)
R&S® LANCOM LX-7000 Universal Mount (Bulk 5)	universal mounting plate for R&S® LANCOM LX-7000 series, compatible with drill hole pattern of R&S® LANCOM LN mount and other widely used AP models, item no. 61914
R&S® LANCOM LX-7000 T-Bar Mount (Bulk 5)	Mounting kit for quick and easy mounting of R&S® LANCOM LX-7000 series APs on suspended ceilings, AL profile width 22-24 mm, item no. 61915
Support	
Warranty extension	Free warranty extension up to 3 years (replacement service for defects) Find details here . The service and support conditions valid as of July 1, 2026, available at rs-nc.rohde-schwarz.com/fileadmin/pdf/LCS/ServiceSupportConditions/Rohde-Schwarz-Networks-and-Cybersecurity-GmbH-Service-and-Support-Conditions-20260701.pdf , apply.
Security updates	Up to 2 years after End of Sale of the device (but min. 3 years, see Link), can be extended by purchasing R&S® NC Support products
Software updates	Regular free updates including new features as part of the R&S® LANCOM Lifecycle Management (Link)
Information on the EU Data Act	For details on product data and data on connected services, please refer to: Link
Manufacturer support	Available with R&S® NC products such as Support Access (for R&S® NC Community Partners only), Direct, or Premium
R&S® NC Replacement Basic S	Security updates until EOL (min. 5 years) and 5 years replacement service with shipment of the replacement device within 5 days after arrival of the defective device (8/5/5Days), item no. 10720
R&S® NC Replacement Advanced S	Security updates until EOL (min. 5 years) and 5 years NBD advance replacement with delivery of the replacement device within one business day (8/5/NBD), item no. 10730
R&S® NC Support Direct Advanced 24/7 S	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, NBD advance replacement with delivery of the device on the next business day (24/7/NBD), guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10776, 10777 or 10778)


R&S® LANCOM LX-7400

Support	
R&S®NC Support Direct 24/7 S	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10752, 10753 or 10754)
R&S®NC Support Direct Advanced 10/5 S	Direct, prioritized 10/5 manufacturer support and security updates for the device, NBD advance replacement with delivery of the device on the next business day (10/5/NBD), guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10764, 10765 or 10766)
R&S®NC Support Direct 10/5 S	Direct, prioritized 10/5 manufacturer support and security updates for the device, guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10740, 10741 or 10742)
Software	
Lifecycle Management	After discontinuation (End of Sale), the device is subject to the R&S®LANCOM Lifecycle Management. Details can be found here .
IT Security made in Germany	The development and quality assurance take place in Germany in accordance with high security standards. The „IT Security made in Germany“ quality label of the German IT Security Association attests to the level of security achieved.
R&S®LANCOM Management Cloud	
R&S®LMC-A-1Y LMC License	R&S®LMC-A-1Y License (1 Year), enables the management of one category A device for one year via the R&S®LANCOM Management Cloud, item no. 50100
R&S®LMC-A-3Y LMC License	R&S®LMC-A-3Y License (3 Years), enables the management of one category A device for three years via the R&S®LANCOM Management Cloud, item no. 50101
R&S®LMC-A-5Y LMC License	R&S®LMC-A-5Y License (5 Years), enables the management of one category A device for five years via the R&S®LANCOM Management Cloud, item no. 50102
Item number(s)	
R&S®LANCOM LX-7400	61933
R&S®LANCOM LX-7400 (Bulk 5)	61934
Antenna Gain	

antenna pattern, 2.4 GHz

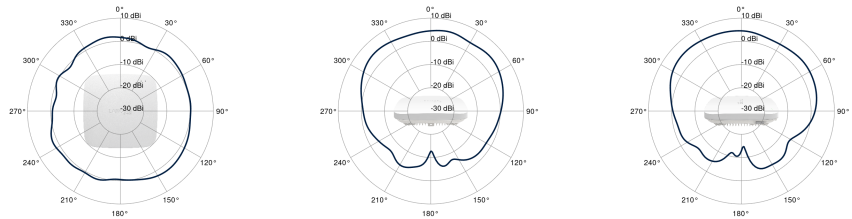

antenna pattern, 5 GHz

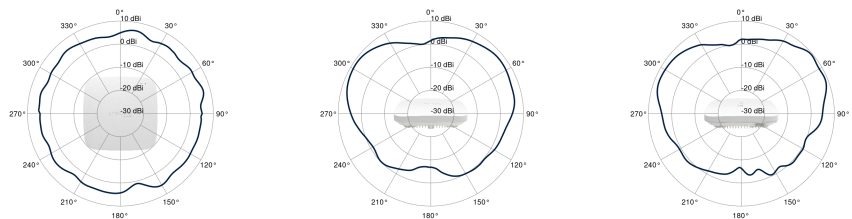


LCOS LX 7.14


R&S® LANCOM LX-7400

Antenna Gain

antenna pattern, 6 GHz

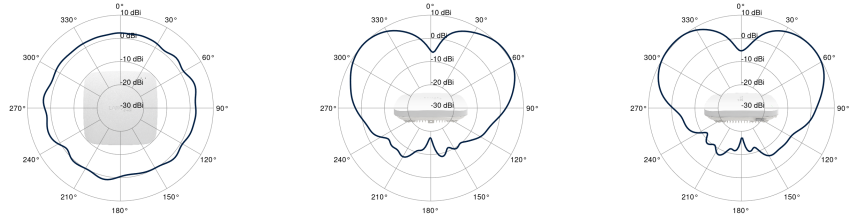

antenna pattern, BLE

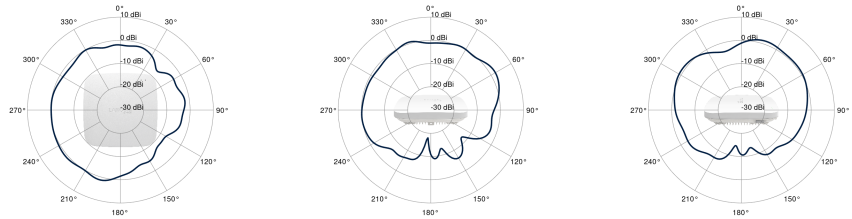

Rohde & Schwarz Networks and Cybersecurity GmbH
Adenauerstr. 20/B2
52146 Wuersele | Germany
info.rs-nc@rohde-schwarz.com | www.rohde-schwarz.com/networks-and-cybersecurity

R&S and Rohde & Schwarz are trademarks of Rohde & Schwarz GmbH & Co. KG, registered or used, among others, in Germany, the EU, the USA, China, and other countries. Other names or designations used may be registered trademarks of different companies or owners. This document contains forward-looking statements regarding products and product features. The publisher reserves the right to change these at any time without stating reasons. No liability is accepted for technical inaccuracies or omissions. 06/2026

ROHDE & SCHWARZ
Make ideas real

