

LCOS LX 7.14

R&S® LANCOM OX-6400

Highly efficient Wi-Fi 6 for outdoor purposes



Wi-Fi is omnipresent today, whether in office environments, schools, universities, shopping centres, sports stadiums or event locations. By using the R&S® LANCOM OX-6400 you get an excellent Wi-Fi experience. This Wi-Fi 6 access point offers low latency and high throughput per client even with high terminal device density. You can therefore trust the capabilities of High Efficiency Wireless.

- ▶ Dual concurrent Wi-Fi – parallel operation at 2.4 GHz and 5 GHz with Wi-Fi 6 (IEEE 802.11ax)
- ▶ 4x4 multi-user MIMO for simultaneous beam-steering for multiple clients in down- an uplink mode
- ▶ OFDMA for efficient Wi-Fi channel usage
- ▶ Significantly longer battery life of connected devices thanks to TWT
- ▶ integrated sector antenna with 70° beam width
- ▶ Support of the security standard WPA3
- ▶ Zero-touch deployment with a R&S® LANCOM WLAN controller or R&S® LANCOM Management Cloud
- ▶ PoE passthrough for power supply to a connected PoE powered device
- ▶ 2x 2.5 Gigabit Ethernet ports (1x PoE-in, 1x PoE-out)

R&S® LANCOM OX-6400

Dual concurrent outdoor Wi-Fi with an aggregated datarate of up to 3,550 Mbps

The R&S® LANCOM OX-6400 offers the Wi-Fi 6 standard (IEEE 802.11ax) for high-speed wireless LAN for clients in the 2.4- and 5-GHz bands. Wi-Fi 6 technology achieves transmission rates of up to 2.400 Mbps at 5 GHz and simultaneously up to 1.150 Mbps at 2.4 GHz.

4x4 Multi-User MIMO for downlinks and uplinks

Multi-user MIMO (MU-MIMO for short) simultaneously distributes all of the available spatial streams of the R&S® LANCOM OX-6400 between several different clients, rather than one after the other as was formerly the case. The available bandwidth is used efficiently and delays in the wireless network are substantially reduced. With Wi-Fi 6, MU-MIMO operates not only for the downlink but for the uplink as well.

OFDMA – carpooling in the radio field

Orthogonal Frequency Division Multiple Access (OFDMA) divides the frequency range of a Wi-Fi channel into a number of frequency blocks per unit of time. This creates subcarriers, which can be as narrow as just 2 MHz. Small data packets, so typical of IoT devices, no longer block entire 20-, 40-, 80- or even 160-MHz channels all by themselves. On the other hand, the R&S® LANCOM OX-6400 Wi-Fi 6 access point is able to bundle multiple subcarriers. This is bit like carpooling, which stops the traffic being blocked by cars with just one occupant: Instead, the streets are freed up with just a few cars carrying several occupants.

160 MHz channel width

The access point can handle channel bandwidths of 20, 40, and 80 MHz (with 4 streams) and 160 MHz (with 2 streams). The channel width of 160 MHz enables a data throughput of up to 2.400 Mbps on appropriate terminals with two antennas that support the reception of two streams at 160 MHz in the 5 GHz frequency band.

Longer battery life thanks to TWT

Previously, smartphones, tablets and notebooks had to be ready to receive all the time so as not to miss their data packets. This can quickly use up battery charge. Wi-Fi 6 delivers a new technology to counteract power consumption on the client side. Target Wake Time, TWT for short, reduces consumption by allowing the access point and the client to negotiate exactly when the receiver should wake up to receive data packets.

Band steering

Optimized load balancing in your Wi-Fi by actively redirecting clients to the less congested and higher performance 5-GHz frequency band.

Operates via the R&S® LANCOM Management Cloud

The R&S® LANCOM OX-6400 offers unsurpassed user-friendliness: Managed through the R&S® LANCOM Management Cloud, it integrates into a holistic, automated network orchestration system based on software-defined networking technology.

Wi-Fi security standard WPA3

WPA3, the successor of WPA2, offers important upgrades and security features for small ("WPA3-Personal") and large networks ("WPA3-Enterprise").

R&S® LANCOM OX-6400

Wi-Fi product specification	
Frequency band 2.4 GHz and 5 GHz	2400-2483.5 MHz (ISM), 5150-5700 MHz (depending on country-specific restrictions)
Integrated Antenna Gain	up to 10 dBi in 2.4 GHz, up to 10 dBi in 5 GHz
Data rates IEEE 802.11ax	<ul style="list-style-type: none"> ▶ up to 2400 MBit/s according to IEEE 802.11ax with MCS11/QAM-1024 at 5 GHz, 4x4 MIMO and 80 MHz channel width or 2x2 MIMO and 160 MHz channel width ▶ up to 1150 MBit/s according to IEEE 802.11ax with MCS11/QAM-1024 at 2.4 GHz, 4x4 MIMO and 40 MHz channel width
Data rates IEEE 802.11ac/n	1733 Mbps according to IEEE 802.11ac (fallback to 6.5 Mbps).
Data rates IEEE 802.11n	600 Mbps according to IEEE 802.11n (fallback to 6.5 Mbps).
Data rates IEEE 802.11a/ h	54 Mbps (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power output) and DFS (automatic channel selection, radar detection)
Data rates IEEE 802.11b/g	54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection)
Radio channels 5 GHz	Up to 16 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel selection depending on national regulations), configurable maximum transmit power
Radio channels 2.4 GHz	Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions), configurable maximum transmit power
Multi-SSID	Up to 32 (simultaneous use of up to 16 independent Wi-Fi networks at WLAN interface 1 and up to 16 independent Wi-Fi networks at WLAN interface 2); time-controlled activation and deactivation of Wi-Fi networks
Concurrent Wi-Fi clients	Up to 512 clients
Hotspot	Support for the Cloud-managed Hotspot in combination with the R&S® LANCOM Management Cloud
Supported Wi-Fi standards	
IEEE standards	IEEE 802.11ax, IEEE 802.11ac Wave 2, IEEE 802.11n, IEEE 802.11a, IEEE 802.11g, IEEE 802.11b, IEEE 802.11i, IEEE 802.1X authenticator, IEEE 802.1X LAN supplicant (only on PoE port), IEEE 802.11h, IEEE 802.11d, IEEE 802.11v
Standard IEEE 802.11ax	
Supported features	4x4 DL-/UL-MU-MIMO, DL-/UL-OFDMA, triggered target-wake-time, BSS coloring, QAM-1024, 80 MHz channels, 160 MHz channels
Standard IEEE 802.11ac	
Supported features	4x4 MIMO, 80 MHz channels, 160 MHz channels, MU-MIMO, QAM-256
Standard IEEE 802.11n	
Supported features	4x4 MIMO, 40-MHz channels, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgement, STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval
Operating modes	
Modes	Standalone, WLC-managed or LANCOM Management Cloud managed
Wi-Fi security	
Encryption options	IEEE 802.1X (WPA3-Enterprise, WPA2-Enterprise), WPA3-Personal, IEEE 802.11i (WPA2-Personal), WEP, LEPS-U (Private PSK, only possible with WPA2), LEPS-MAC
Encryption algorithms	AES-CCMP, AES-GCMP, TKIP, RC4
EAP types (authenticator)	EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-FAST
Roaming	
Roaming	IAPP (Inter Access Point Protocol), Fast Roaming (802.11r), OKC, Pre-Authentication, 802.11k
R&S® LANCOM Active Radio Control	
Band Steering	Steering of 5GHz clients to the corresponding high-performance frequency band; support for 802.11v

R&S® LANCOM OX-6400

Bluetooth Low Energy (BLE)	
Support of Bluetooth Low Energy technology (BLE)	The device can scan the environment for BLE devices and can forward the resulting scan data via a REST API.
Layer 2 functions	
VLAN	4094 VLAN IDs, static assignment to SSIDs, dynamic Assignment via LEPS-U/LEPS-MAC or 802.1X (RADIUS)
Quality of Service	WME based on IEEE 802.11e
Bandwidth limitation	per SSID, per Client
Multicast	IGMP-Snooping, Multicast-to-Unicast-conversion on WLAN interfaces
Protocols	LLDP, Proxy ARP, LACP, L2TPv3
Network	
Protocols	IPv4, IPv6, dual stack
Interfaces	
Ethernet ports	► 2x 10/100/1000/2.5GBASE-T (RJ45/8P8C), PoE (Power over Ethernet), PoE Passthrough
Internal antenna	integrated WLAN sector antenna (70°), integrated BLE antenna
Hardware	
Power supply	PoE 802.3bt if PoE Passthrough is used (802.3at max. available via PoE passthrough); PoE 802.3at if PoE passthrough is not used.
Power consumption	max. 25W (without PoE Passthrough)
Environment	temperature range -30°C - +65°C, protection class IP67
Housing	Robust metal housing, IP67 protection rating, ready for wall and pole mounting, 3 LEDs for status display, please note: device must not be mounted in salt water environments without a suitable protective housing; Dimensions 255 × 250 × 80 mm (length x width x depth)
Management and monitoring	
Management	R&S® LANCOM Management Cloud, WLAN-Controller, WEBconfig, LANconfig, LL2M, external Syslog, Packet Capturing
Monitoring	R&S® LANCOM Management Cloud, WLAN-Controller, WEBconfig, LANmonitor, SNMP
Conformity*	
Europe/EFTA	CE
Australia / New Zealand	RCM
Country of Origin	Software designed in Germany, Assembled in Malaysia or Assembled in China
*) Note	The full text of the specific Declaration of Conformity is available here
Scope of delivery	
Documentation	Installation Guide (DE/EN); Mounting Instructions (DE/EN)
Mounting kit	Mounting kit for wall and pole mounting
Cable	Water-resistant, UV-resistant Ethernet PoE cable with water-resistant screw connector, 15m, temperature range from -33°C to +70°C
Accessories	
R&S® LANCOM PoE++ 10G Injector	1-port PoE injector with up to 10 Gigabit support, integrated power supply, compatible with the standard IEEE 802.3af/at/bt (up to 65W), item no. 61839 (EU)


R&S® LANCOM OX-6400

Support	
Warranty extension	Free warranty extension up to 3 years (replacement service for defects) Find details here . The service and support conditions valid as of July 1, 2026, available at rs-nc.rohde-schwarz.com/fileadmin/pdf/LCS/ServiceSupportConditions/Rohde-Schwarz-Networks-and-Cybersecurity-GmbH-Service-and-Support-Conditions-20260701.pdf , apply.
Security updates	Up to 2 years after End of Sale of the device (but min. 3 years, see Link), can be extended by purchasing R&S®NC Support products
Software updates	Regular free updates including new features as part of the R&S®LANCOM Lifecycle Management (Link)
Information on the EU Data Act	For details on product data and data on connected services, please refer to: Link
Manufacturer support	Available with R&S®NC products such as Support Access (for R&S®NC Community Partners only), Direct, or Premium
R&S®NC Replacement Basic L	Security updates until EOL (min. 5 years) and 5 years replacement service with shipment of the replacement device within 5 days after arrival of the defective device (8/5/5Days), item no. 10722
R&S®NC Replacement Advanced L	Security updates until EOL (min. 5 years) and 5 years NBD advance replacement with delivery of the replacement device within one business day (8/5/NBD), item no. 10732
R&S®NC Support Direct Advanced 24/7 L	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, NBD advance replacement with delivery of the device on the next business day (24/7/NBD), guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10782, 10783 or 10784)
R&S®NC Support Direct 24/7 L	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10758, 10759 or 10760)
R&S®NC Support Direct Advanced 10/5 L	Direct, prioritized 10/5 manufacturer support and security updates for the device, NBD advance replacement with delivery of the device on the next business day (10/5/NBD), guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10770, 10771 or 10772)
R&S®NC Support Direct 10/5 L	Direct, prioritized 10/5 manufacturer support and security updates for the device, guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10746, 10747 or 10748)
Software	
Lifecycle Management	After discontinuation (End of Sale), the device is subject to the R&S®LANCOM Lifecycle Management. Details can be found here .
IT Security made in Germany	The development and quality assurance take place in Germany in accordance with high security standards. The „IT Security made in Germany“ quality label of the German IT Security Association attests to the level of security achieved.
R&S®LANCOM Management Cloud	
R&S®LMC-A-1Y LMC License	R&S®LMC-A-1Y License (1 Year), enables the management of one category A device for one year via the R&S®LANCOM Management Cloud, item no. 50100
R&S®LMC-A-3Y LMC License	R&S®LMC-A-3Y License (3 Years), enables the management of one category A device for three years via the R&S®LANCOM Management Cloud, item no. 50101
R&S®LMC-A-5Y LMC License	R&S®LMC-A-5Y License (5 Years), enables the management of one category A device for five years via the R&S®LANCOM Management Cloud, item no. 50102
Item number(s)	
R&S®LANCOM OX-6400 (EU)	61865


R&S® LANCOM OX-6400

Antenna Gain


antenna pattern, 2.4 GHz

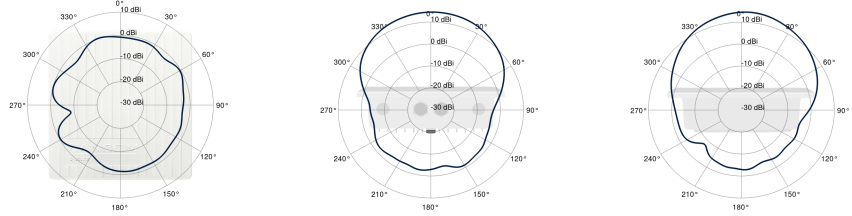


antenna pattern, 5.2 GHz

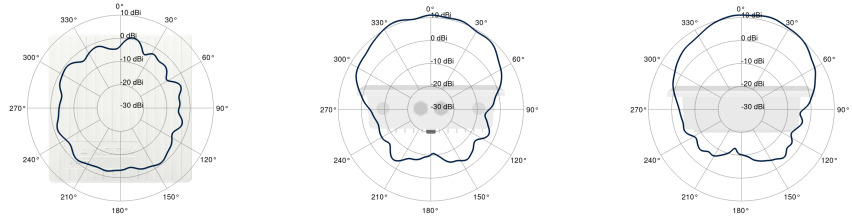

antenna pattern, 5.6 GHz

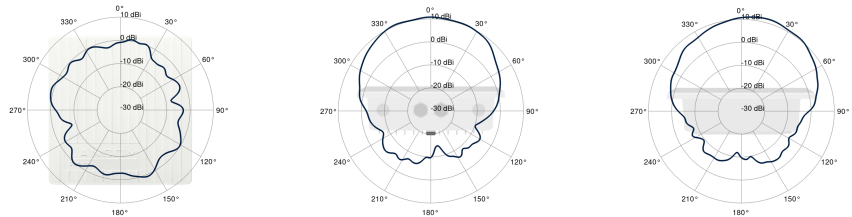


antenna pattern, BLE

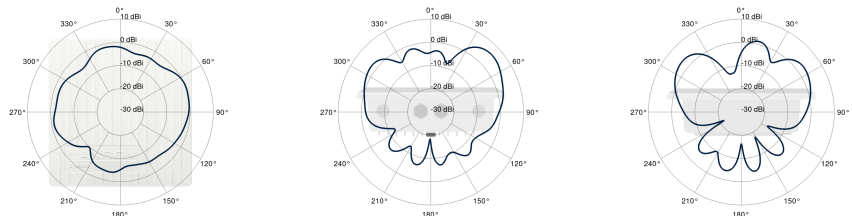

LCOS LX 7.14

R&S® LANCOM OX-6400

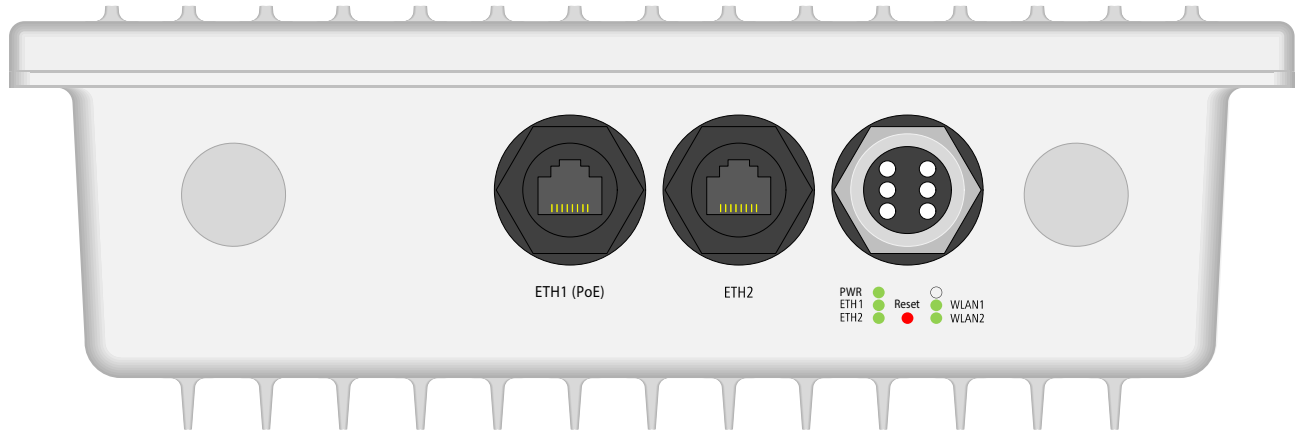

Rohde & Schwarz Networks and Cybersecurity GmbH
Adenauerstr. 20/B2
52146 Wuersele | Germany
info.rs-nc@rohde-schwarz.com | www.rohde-schwarz.com/networks-and-cybersecurity

R&S and Rohde & Schwarz are trademarks of Rohde & Schwarz GmbH & Co. KG, registered or used, among others, in Germany, the EU, the USA, China, and other countries. Other names or designations used may be registered trademarks of different companies or owners. This document contains forward-looking statements regarding products and product features. The publisher reserves the right to change these at any time without stating reasons. No liability is accepted for technical inaccuracies or omissions. 06/2026

ROHDE & SCHWARZ
Make ideas real

