


R&S®LANCOM UF EXTENSION MODULES

Versatile port extension for your firewalls

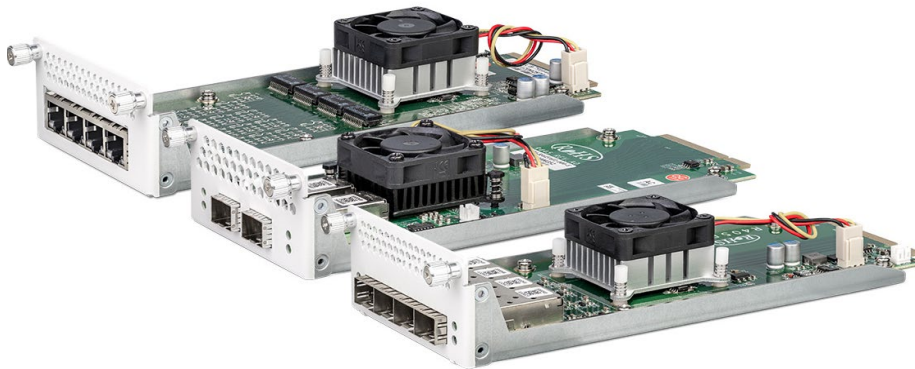

With these extension modules, you can easily and flexibly add additional ports to your R&S®LANCOM Unified Firewalls. Whether for fast fiber-optic networking or as a copper-bound Ethernet port: With the R&S®LANCOM UF Extension Modules, you can individually adapt your firewalls to your network requirements. In combination with suitable R&S®LANCOM SFP transceiver modules, you also benefit from the best connections and maximum reliability thanks to tested compatibility.


- ▶ [R&S®LANCOM UF Extension Module 4x 1G GE \(UF-X60\)](#)
- ▶ [R&S®LANCOM UF Extension Module 8x 1G GE \(UF-X60\)](#)
- ▶ [R&S®LANCOM UF Extension Module 4x 1G SFP \(UF-X60\)](#)
- ▶ [R&S®LANCOM UF Extension Module 2x 10G SFP+ \(UF-X60\)](#)
- ▶ [R&S®LANCOM UF Extension Module 4x 10G SFP+ \(UF-X60\)](#)
- ▶ [R&S®LANCOM UF Extension Module 2x 40G QSFP+ \(UF-760\)](#)
- ▶ [R&S®LANCOM UF Extension Module 2x 100G QSFP28 \(UF-1060\)](#)

Extension Modules for older R&S®LANCOM Unified Firewalls

- ▶ [R&S®LANCOM UF Extension Module 8x 1G GE \(UF-500, UF-9XX\)](#)
- ▶ [R&S®LANCOM UF Extension Module 2x 10G GE \(UF-500, UF-9XX\)](#)
- ▶ [R&S®LANCOM UF Extension Module 4x 1G SFP \(UF-500, UF-9XX\)](#)


R&S®LANCOM UF EXTENSION MODULES

R&S®LANCOM UF Extension Module 4x 1G GE (UF-X60)

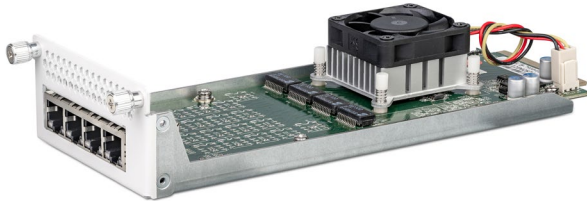

- ▶ 4x 1 Gbps RJ45 Ethernet ports
- ▶ Operating temperature 0 °C – 45 °C
- ▶ Humidity 20 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-360, UF-760

R&S®LANCOM UF Extension Module 8x 1G GE (UF-X60)

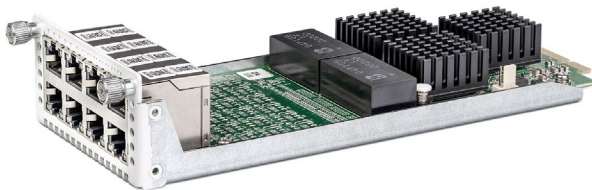

- ▶ 8x 1 Gbps RJ45 Ethernet ports
- ▶ Operating temperature 0 °C – 45 °C
- ▶ Humidity 20 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-360, UF-760

R&S®LANCOM UF EXTENSION MODULES

R&S®LANCOM UF Extension Module 4x 1G SFP (UF-X60)



- ▶ 4x 1 Gbps SFP ports
- ▶ Operating temperature 0 °C – 45 °C
- ▶ Humidity 20 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-360, UF-760
- ▶ Compatible with R&S®LANCOM SFP-LX-LC1, SFP-SX-LC1, SFP-LX-LC10, SFP-SX-LC10, SFP-DAC10


R&S®LANCOM UF Extension Module 2x 10G SFP+ (UF-X60)



- ▶ 2x 10 Gbps SFP+ ports
- ▶ Operating temperature 0 °C – 45 °C
- ▶ Humidity 20 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-360, UF-760
- ▶ Compatible with R&S®LANCOM SFP-LX-LC1, SFP-SX-LC1, SFP-LX-LC10, SFP-SX-LC10, SFP-DAC10

R&S®LANCOM UF EXTENSION MODULES

R&S®LANCOM UF Extension Module 4x 10G SFP+ (UF-X60)

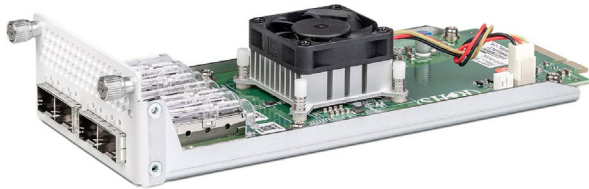

- ▶ 4x 10 Gbps SFP+ ports
- ▶ Operating temperature 0 °C – 45 °C
- ▶ Humidity 20 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-360, UF-760
- ▶ Compatible with R&S®LANCOM SFP-LX-LC1, SFP-SX-LC1, SFP-LX-LC10, SFP-SX-LC10, SFP-DAC10


R&S®LANCOM UF Extension Module 2x 40G QSFP+ (UF-760)



- ▶ 2x 40 Gbps QSFP+ ports
- ▶ Operating temperature 0 °C – 45 °C
- ▶ Humidity 20 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-760
- ▶ Compatible with R&S®LANCOM SFP-SR-MPO40, R&S®LANCOM SFP-LR-LC40, R&S®LANCOM SFP-DAC40-1M/-3M

R&S®LANCOM UF EXTENSION MODULES

R&S®LANCOM UF Extension Module 2x 100G QSFP28 (UF-1060)

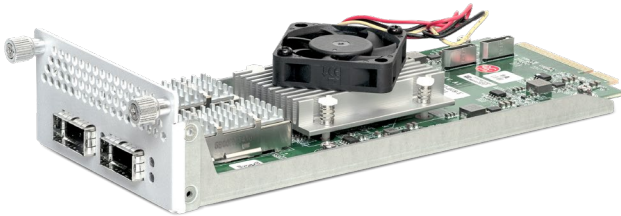

- ▶ 2x 100 Gbps QSFP28 ports
- ▶ Operating temperature 0 °C – 45 °C
- ▶ Humidity 20 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-1060
- ▶ Compatible with R&S®LANCOM SFP-LR-LC100, SFP-SR-MPO100, and SFP-DAC100

R&S®LANCOM UF EXTENSION MODULES

Extension Modules for older R&S®LANCOM Unified Firewalls

R&S®LANCOM UF Extension Module 8x 1G GE (UF-500, UF-9XX)



- ▶ 8x 1 Gbps RJ45 Ethernet ports
- ▶ Operating temperature 0 °C – 40 °C
- ▶ Humidity 5 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-500, UF-900/910

R&S®LANCOM UF Extension Module 2x 10G GE (UF-500, UF-9XX)



- ▶ 2x 10 Gbps RJ45 Ethernet ports
- ▶ Operating temperature 0 °C – 40 °C
- ▶ Humidity 5 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-500, UF-900/910

R&S®LANCOM UF EXTENSION MODULES

Extension Modules for older R&S®LANCOM Unified Firewalls

R&S®LANCOM UF Extension Module 4x 1G SFP (UF-500, UF-9XX)



- ▶ 4x 1 Gbps SFP ports
- ▶ Operating temperature 0 °C – 40 °C
- ▶ Humidity 5 % – 90 %
- ▶ Compatible with R&S®LANCOM Unified Firewall UF-500, UF-900/910
- ▶ Compatible with R&S®LANCOM SFP-LX-LC1, SFP-SX-LC1, SFP-LX-LC10, SFP-SX-LC10, SFP-DAC10

R&S®LANCOM UF EXTENSION MODULES

	R&S®LANCOM UF Extension Module 4x 1G GE (UF-X60)	R&S®LANCOM UF Extension Module 8x 1G GE (UF-X60)	R&S®LANCOM UF Extension Module 4x 1G SFP (UF-X60)	R&S®LANCOM UF Extension Module 2x 10G SFP+ (UF-X60)	R&S®LANCOM UF Extension Module 4x 10G SFP+ (UF-X60)
Item number	55131	55149	55129	55130	55147
Warranty	2 years	2 years	2 years	2 years	2 years
Ports	4x 1G RJ45 Ethernet	8x 1G RJ45 Ethernet	4x 1G SFP	2x 10G SFP+	4x 10G SFP+
Operating temperature (°C)	0 – 45	0 – 45	0 – 45	0 – 45	0 – 45
Rel. humidity (%)	20 – 90	20 – 90	20 – 90	20 – 90	20 – 90
	R&S®LANCOM UF Extension Module 2x 40G QSFP+ (UF-760)	R&S®LANCOM UF Extension Module 2x 100G QSFP28 (UF-1060)			
Item number	55118	55251			
Warranty	2 years	2 years			
Ports	2x 40G QSFP+	2x 100G QSFP28			
Operating temperature (°C)	0 – 45	0 – 45			
Rel. humidity (%)	20 – 90	20 – 90			
	Extension Modules for older R&S®LANCOM Unified Firewalls				
	R&S®LANCOM UF Extension Module 8x 1G GE (UF-500, UF-9XX)	R&S®LANCOM UF Extension Module 2x 10G GE (UF-500, UF-9XX)	R&S®LANCOM UF Extension Module 4x 1G SFP (UF-500, UF-9XX)		
Item number	55121	55126	55122		
Warranty	2 years	2 years	2 years		
Ports	8x 1G RJ45 Ethernet	2x 10G RJ45 Ethernet	4x 1G SFP		
Operating temperature (°C)	0 – 40	0 – 40	0 – 40		
Rel. humidity (%)	5 – 90	5 – 90	5 – 90		

R&S®LANCOM devices and other R&S®LANCOM accessories compatible with the R&S®LANCOM UF Extension Modules can be found [here](#).

Rohde & Schwarz Networks and Cybersecurity GmbH
Adenauerstr. 20/B2
52146 Wuersele | Germany
info.rs-nc@rohde-schwarz.com | www.rohde-schwarz.com/networks-and-cybersecurity

R&S and Rohde & Schwarz are trademarks of Rohde & Schwarz GmbH & Co. KG, registered or used, among others, in Germany, the EU, the USA, China, and other countries. Other names or designations used may be registered trademarks of different companies or owners. This document contains forward-looking statements regarding products and product features. The publisher reserves the right to change these at any time without stating reasons. No liability is accepted for technical inaccuracies or omissions. 08/2026

ROHDE & SCHWARZ
Make ideas real

