
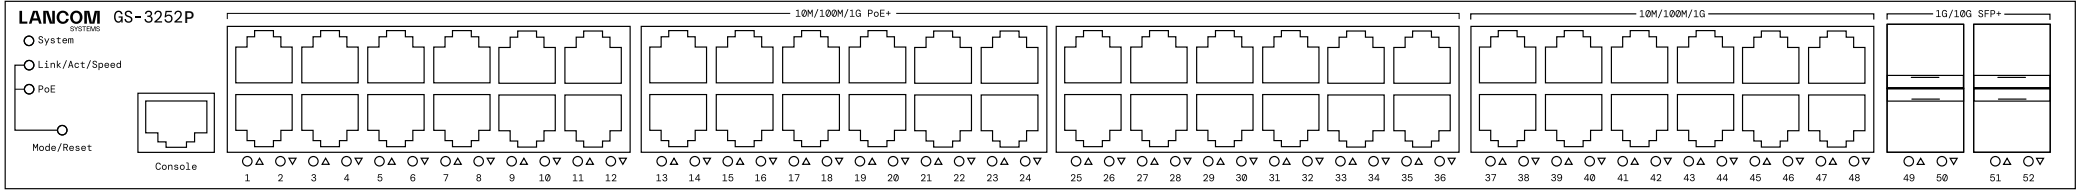


Hardware Quick Reference

LANCOM GS-3252P



- ①
- ②
- ③
- ④

- ①

Configuration interface (Console)
Connect the configuration interface via the included serial configuration cable to the serial interface of the device you want to use for configuring / monitoring the switch.
- ②

TP Ethernet interfaces 10M / 100M / 1G PoE+
Use Ethernet cables to connect the interfaces 1 to 36 to your PC or a LAN switch.
- ③

TP Ethernet interfaces 10M / 100M / 1G
Use Ethernet cables to connect the interfaces 37 to 48 to your PC or a LAN switch.
- ④

SFP+ interfaces 1G / 10G
Insert suitable LANCOM SFP modules into the SFP+ interfaces 49 to 52. Choose cables which are compatible with the SFP modules and connect them as described in the module's documentation.
- ⑤

Power connector (device back side)
Supply power to the device via the power connector. Please use the IEC power cable supplied or a country-specific LANCOM Power Cord.
- ⑥

ATTENTION: High touch current possible! Connect to earth before connecting the power supply.

Before initial startup, please make sure to take notice of the information regarding the intended use in the enclosed installation guide!

Operate the device only with a professionally installed power supply at a nearby power socket that is freely accessible at all times.


The power plug of the device must be freely accessible.

Please note that support for third-party accessories (SFP and DAC) is not provided.

Please observe the following when setting up the device

- For devices to be operated on the desktop, please attach the adhesive rubber footpads
- Do not rest any objects on top of the device and do not stack multiple devices
- Keep all ventilation slots of the device clear of obstruction
- Mount the device into a 19" unit in a server cabinet using the provided screws and mounting brackets.

Mounting & connecting

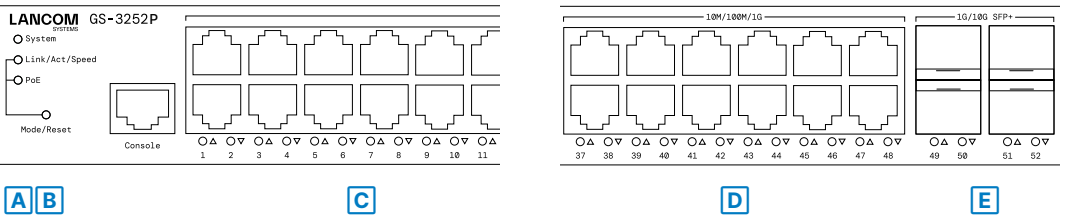

A System / Link/Act/Speed / PoE-LED	D TP Ethernet ports 10M / 100M / 1G
System: off	Off
System: green	Green
System: red	Green, blinking
Link/Act/Speed: green	Orange
PoE: green	Orange, blinking
B Mode / Reset button	E SFP+ ports 1G / 10G
Short press	Off
~5 sec. pressed	Blue
Pressed until all port LEDs glow	Blue, blinking
C TP Ethernet ports 10M / 100M / 1G PoE+	Green
Off	Green, blinking
Green	Orange
Green, blinking	Orange, blinking

Hardware	
Power supply	Internal power supply unit
Environment	Temperature range 0-40° C; short term temperature conditions 0-50°C; humidity 10-90%; non-condensing
Housing	Robust metal housing, 1 HU with removable mounting brackets for 19" installation, network connectors on the front, 442 x 44 x 375 mm (W x H x D)
Number of fans	1
Interfaces	
ETH	36 TP Ethernet ports 10 / 100 / 1000 Mbps PoE+ 12 TP Ethernet ports 10 / 100 / 1000 Mbps
SFP	4 SFP+ ports 1 / 10 Gbps 52 concurrent ports in total
Package Content	
Mounting brackets	2 19" brackets for rack mounting; If an additional rear support surface is required for more stable mounting of the switch, please use the LANCOM Switch Rack Mount L250, item no.: 61432, which is available as an accessory.
Cable	1 IEC power cord, 1 serial configuration cable 1.5 m

Hereby, LANCOM Systems GmbH | Adenauerstrasse 20/B2 | D-52146 Wuerselen, declares that this device is in compliance with Directives 2014/30/EU, 2014/35/EU, 2011/65/EU, and Regulation (EC) No. 1907/2006. The full text of the EU Declaration of Conformity is available at the following Internet address: www.lancom-systems.com/doc