




LEDs overview of the LANCOM OW-602

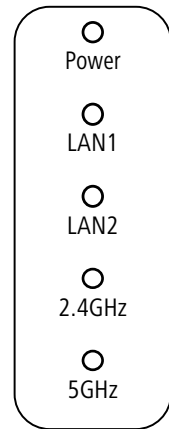

Power		LAN1 / LAN2	
Off	Device switched off	Off	No networking device attached
Green, permanently*	Device operational, resp. device paired / claimed and LANCOM Management Cloud (LMC) accessible	Green, permanently	Connection to network device operational, no data traffic
1x green inverse blinking*	Connection to the LMC active, pairing OK, device not claimed	Green, flickering	Data traffic
2x green inverse blinking*	Pairing error, resp. LMC activation code not available	2.4GHz / 5GHz	
3x green inverse blinking*	LMC not accessible, resp. communication error	Off	No Wi-Fi network defined or Wi-Fi module deactivated. The Wi-Fi module is not transmitting beacons.
		Green	At least one Wi-Fi network is defined and Wi-Fi module activated. The Wi-Fi module is transmitting beacons.
		Green, blinking	DFS scanning or other scan procedure

Quick Installation Guide LANCOM OW-602

Documentation / Firmware	Service & Support	All information on your device
Basically, current versions of the LCOS firmware, drivers, tools and documentation for all LANCOM and AirLancer products are available for download free of charge from our website.	The LANCOM Knowledge Base — with over 2,500 articles — is available to you at any time via the LANCOM website: www.lancom-systems.com/knowledgebase	
You will also find explanations of all the functions of your LANCOM device in the LCOS Reference Manual: www.lancom-systems.de/docs/LCOS/Refmanual/EN/	If you have any further questions, please submit your request via our Service & Support portal: www.lancom-systems.com/service-support	
All information on the interfaces and connection options of your device can be found under the following QR code in the Hardware Quick Reference :	Information on the lifecycle, in particular on End of Sale / End of Life and on the supply of LANCOM devices with security updates can be found at: www.lancom-systems.com/lifecycle	
	Package contents	
	Antennas	4 external dipole single-band Wi-Fi antennas (2 for 2.4 GHz and 2 for 5 GHz)
	Mounting kit	Equipment for wall and pole mounting, screws included; grounding cable

Initial start-up

Establishing the required connections for device configuration

→ Always observe the adjacent safety instructions and notes.
For the power supply select the description **a)** or **b)** applicable to the equipment of the present device

a) PoE power supply via PoE network device	b) PoE power supply via separate PoE injector
Connect a network cable to the Ethernet port marked PoE on the device and a free PoE-active network socket on your local network (e.g. on a PoE-capable switch).	Connect a network cable to the Ethernet port marked PoE on the device and the output of the PoE injector. Then connect another network cable to the input of the PoE injector and a free NON-PoE-active network outlet of your local network. Connect the PoE injector to the power supply.

Always observe the documentation of the PoE injector or PoE switch!

→ Use suitable cables to connect other required device interfaces to other components and, in the case of devices with Wi-Fi or mobile radio interfaces, connect any antennas supplied.

→ Depending on the device equipment, choose one of the following configuration methods **a)** or **b)**

- a) Configuration via the LANCOM Management Cloud (LMC)**
The LMC automatically rolls out the configuration to your device, provided it has access to the Internet. If a router that establishes the Internet connection should be added to the LMC, it may first be necessary to configure a basic configuration and an Internet connection via the local network, as described under **b)**.
- b) Configuration via the local network**
Connect one of the **ETH** or **LAN** interfaces of the device via an Ethernet cable either to a network switch or directly to the network device intended for configuration (e.g. notebook).
The CONFIG or COM interface is not suitable for configuration via the network!

Options for initial start-up of the unconfigured device

→ **Option 1: via the LANCOM Management Cloud (LMC)**

The LANCOM Management Cloud allows LANCOM partners to automate the commissioning, centralized management, and monitoring of LANCOM devices. Further information on commissioning and configuration via the LMC can be found at www.lancom-systems.com/lmc-access.

→ **Option 2: via web browser (WEBconfig)**

Configuration via web browser is an easy and fast variant, since no additional software is required on the computer used for configuration.

Note: If a certificate warning appears in your browser when trying to connect to your device, there is a button or link on the displayed browser page to connect to the device anyway (depending on the browser, usually under **Advanced**).

In this procedure, the DNS server used in your network must be able to resolve the host name reported by the device via DHCP. When using a LANCOM device as a DHCP and DNS server, this is the default case.

At <https://lancom-XXYYZZ> you can access your device. Replace **XXYYZZ** with the last six digits of the **MAC address** of your device, which you can find on the enclosed document **LANCOM Management Cloud** or on the nameplate of the device. If necessary, append the domain name of your local network (e.g. **.intern**).

Alternatively, for configuration via TCP/IP you need the IP address of the device in the local network (LAN) so that you can enter it in any web browser. If necessary, determine the IP address at the DHCP server or router.

- When connecting the computer to an unconfigured LANCOM device, WEBconfig automatically calls up the start page for device configuration. Here you select whether you want to configure the device via the **LANCOM Management Cloud** (→ **Option 3**, see below) or via **Stand-alone configuration**.
- If you select **Stand-alone configuration**, you will be redirected to the dashboard after setting the access data.
- On the dashboard, under **Wi-Fi configuration** → **Add new SSID**, configure an **SSID** and an associated password (**PSK**). After **saving** the configuration, check the accessibility of the new SSID e.g. by smartphone via the displayed **QR code**. The initial commissioning of the device is now complete.

→ **Option 3: via the Windows software LANconfig (www.lancom-systems.com/downloads)**

- Please wait until the booting process of the device is completed before starting LANconfig.
- Unconfigured LANCOM devices are automatically found by LANconfig in the local network (LAN) and the setup wizard **Basic settings** is then started.
- After the setup wizard has finished, the initial start-up of the device is complete.
- If necessary, make further configurations using the setup wizards available for selection.

General safety instructions

- Under no circumstances should the device housing be opened and the device repaired without authorization. Any device with a case that has been opened is excluded from the warranty.
- If antennas are available, they may only be installed or replaced when the device is switched off. Mounting or demounting antennas while the device is powered on may cause the destruction of the radio module.
- Mounting, installation, and commissioning of the device may only be carried out by qualified personnel.

Safety instructions and intended use

In order to avoid harming yourself, third parties or your equipment when installing your LANCOM device, please observe the following safety instructions. Operate the device only as described in the corresponding documentation. Pay particular attention to all warnings and safety instructions. Use only those third-party devices and components that are recommended or approved by LANCOM Systems.

Before commissioning the device, be sure to study the corresponding Hardware Quick Reference which can be downloaded from the LANCOM website www.lancom-systems.com/downloads.

Any warranty and liability claims against LANCOM Systems are excluded in the event of any use other than the intended use described below!

Environment

LANCOM devices should only be operated when the following environmental requirements are met:

- Ensure that you comply with the temperature and humidity ranges specified in the Quick Reference Guide for the LANCOM device.
- Do not expose the device to direct sunlight (does not apply to outdoor devices).
- Ensure that there is adequate air circulation and do not obstruct the ventilation slots.
- Do not cover devices or stack them on top of one another
- The device must be mounted so that it is freely accessible (for example, it should be accessible without the use of technical aids such as elevating platforms (does not apply to outdoor devices)); a permanent installation (e.g. under plaster) is not permitted.
- Only outdoor equipment intended for this purpose is to be operated outdoors.
- When operating an outdoor device without a suitable surge protection adapter, LANCOM does not provide any warranty in case of surge damage.

Power supply

Before start-up, the following points must be observed, as improper use can lead to personal injury and damage to property, as well as voiding the warranty:

- If available, the power plug of the device must be freely accessible.
- Operate the device only with a professionally installed power supply at a nearby and at all times freely accessible socket.
- Only use the enclosed power supply / IEC cable or the one listed in the hardware quick reference.
- A high touch current is possible for devices with metal housing and grounding screw! Before connecting the power supply, connect the grounding screw to a suitable ground potential.
- Some devices support power supply via an Ethernet cable (Power over Ethernet - PoE). Please refer to the corresponding notes in the hardware quick reference of the device.
- Never operate damaged components.
- Only switch on the device when the housing is closed.
- The device must not be installed during thunderstorms and should be disconnected from the power supply during thunderstorms.
- In case of emergency (e.g. damage, ingress of liquids or objects, for example through the ventilation slots), disconnect the power supply immediately.

Applications

- The devices may only be used in accordance with the relevant national regulations and under consideration of the legal situation applicable there.
- The devices must not be used for the actuation, control, and data transmission of machinery that, in case of malfunction or failure, may present a danger to life and limb.
- The devices with their respective software are not designed, intended or certified for use in: the operation of weapons, weapons systems, nuclear facilities, mass transportation, autonomous vehicles, aircraft, life support computers or equipment (including resuscitators and surgical implants), pollution control, hazardous materials management, or other hazardous applications where failure of the device or software could lead to a situation in which personal injury or death could result. The customer is aware that the use of the devices or software in such applications is entirely at the customer's risk.

Regulatory Notice

Regulatory compliance for devices with radio or Wi-Fi interfaces

This LANCOM device is subject to governmental regulation. The user is responsible for ensuring that this device operates in accordance with local regulatory guidelines, specifically for compliance with potential channel restrictions.

Channel restrictions in Wi-Fi operation for devices with Wi-Fi interfaces

When operating this radio equipment in EU countries the frequency range 5,150 – 5,350 MHz (Wi-Fi channels 36 – 64) as well as the frequency range 5,945 – 6,425 MHz (Wi-Fi channels 1 – 93) is limited to indoor use.

Maximum transmission power for devices with radio or Wi-Fi interfaces

This LANCOM device may contain one or more radio interfaces using various technologies. The maximum output power per technology and used frequency band for use in EU countries is described in the following tables:

Technology	Frequency range (MHz)	Max. output power (dBm EIRP)
Wi-Fi	2,400 – 2,483.5	20
	5,150 – 5,350	20
	5,470 – 5,725	30
BLE / SRD / ESL (ePaper)	2,400 – 2,483.5	10

Declarations of Conformity

You will find all the Declarations of Conformity concerning our product portfolio under www.lancom-systems.com/doc. These documents contain all the tested standards and required guidelines in the area of EMC - SAFETY - RF, as well as the proof of the guidelines concerning RoHS & REACH.

CE Simplified Declaration of Conformity

Hereby, LANCOM Systems GmbH | Adenauerstrasse 20/B2 | D-52146 Wuerselen, declares that this device is in compliance with Directives 2014/30/EU, 2014/35/EU, 2014/53/EU, 2011/65/EU, and Regulation (EC) No. 1907/2006. The full text of the EU Declaration of Conformity is available at the following Internet address: www.lancom-systems.com/doc

LANCOM FCC Regulatory Notice Class A Devices

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
WARNING:

This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

The FCC declaration of conformity may be downloaded from www.lancom-systems.com/doc under the corresponding product section.

Symbols on the device label

- The appliance must not be disposed of with household waste.
- Surface may be hot!